



Advanced Parallel Programming


Miscellaneous MPI-IO topics

Dr Toni Collis
Applications Consultant
acollis@[epcc.ed.ac.uk](mailto:acollis@epcc.ed.ac.uk)

- Unlike the rest of MPI, MPI-IO errors are not fatal
 - probably don't want your program to crash if a file open fails
 - always need to check the error code!
- Many different error codes can be reported
 - I would suggest simply quitting if `ierr != MPI_SUCCESS`
- Can change this behaviour for file operations
 - same functionality as `MPI_Errhandler_create` etc.
 - called `MPI_File_create_errhandler`, ...
 - error handlers are attached to file handles rather than communicators
 - can set handler to be `MPI_ERRORS_ARE_FATAL`

- Useful to check length of output file
 - `ls -l <filename>`
 - check that size (in bytes) is what you expect
- Can be confusing if file already exists
 - length will be increased if new file is longer than existing file
 - but may not be decreased if new file is shorter!
- Delete old files before running your test programs

- Usually pass the basic type of the array being processed
 - eg `MPI_FLOAT`, `MPI_REAL`
- Can pass derived types
 - useful for receiving the core of an array when local arrays have halos

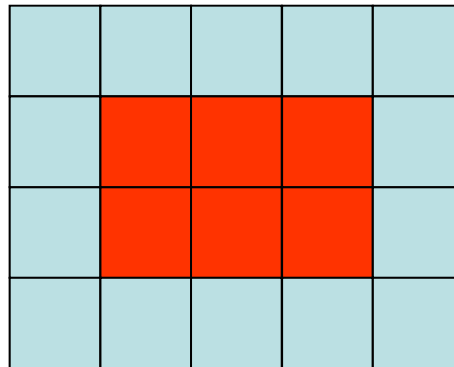

```
MPI_File_read_all(fh, &x[1][1], 1, vector3x2, ...);
```

```
MPI_FILE_READ_ALL(fh, x(2,2) , 1, vector3x2, ...)
```

- or could use a 3x2 subarray and pass `&x[0][0]` or `x(1,1)`

- We have just considered block decompositions
 - where local array size is an exact multiple of global array size
- If the sizes don't match
 - define different sized subarrays on each process
 - eg processes at the edge of the grid have smaller subsections
- This does not generalize to block-cyclic decompositions
 - how do we specify discontinuous subarrays?

4	8	12	16
3	7	11	15
2	6	10	14
1	5	9	13

```
int MPI_Type_create_darray(int size, int rank,  
    int ndims, int array_of_gsizes[],  
    int array_of_distrib[], int array_of_dargs[],  
    int array_of_psizes[], int order,  
    MPI_Datatype oldtype, MPI_Datatype *newtype);
```

```
MPI_TYPE_CREATE_DARRAY(SIZE, RANK, NDIMS  
    ARRAY_OF_GSIZES, ARRAY_OF_DISTRIBS, ARRAY_OF_DARGS,  
    ARRAY_OF_PSIZEs, ORDER, OLDTYPE, NEWTYPE, IERR)
```

```
INTEGER SIZE, RANK, NDIMS, ARRAY_OF_GSIZES(*),  
    ARRAY_OF_DISTRIBS(*), ARRAY_OF_DARGS(*),  
    ARRAY_OF_PSIZEs(*), ORDER, OLDTYPE, NEWTYPE, IERR
```

- See the man page for full details!
 - uses HPF conventions for block-cyclic distributions

- Imagine a particle simulation
 - each particle is a compound object with a type and position (x,y,z)
 - eg a C struct or Fortran type
 - each particle has unique global identifier 1, 2, 3, ..., N-1, N
- Particles move around
 - at the end of a simulation, each process will have:
 - a different numbers of particles
 - with a random mixture of global identifiers
- Two choices
 - write to file in the order they appear in the processes
 - write to file with position based on global identifier

- Define a derived type to match the particle object
 - eg `MPI_PARTICLE`
 - use this as the etype
- Writing in process order
 - need to know where to start in the file
 - calculate the sum of the number of particles on previous ranks
 - using `MPI_Scan`
- Writing in global order
 - call `MPI_Type_indexed` (or `create_indexed_block`)
 - use this as the filetype
 - write multiple instances of `MPI_PARTICLE`

- Similar to global ordering of particles
 - each element has both a local and global identifier
 - want the file to be ordered by the global id

- Define an **MPI_ELEMENT**
 - use this as the etype
 - create an indexed filetype based on global id

- This code spends a lot of time waiting while saving to disk

```
define big arrays: old and new
```

```
loop many times
```

```
    ! do a computationally expensive operation
```

```
    new = expensive_function(old)
```

```
    old = new
```

```
    every 10 iterations:
```

```
        save_to_disk(old)
```

```
end loop
```

- This code overlaps computation and IO

```
define big arrays: old and new
```

```
loop many times
```

```
! do a computationally expensive operation
```

```
new = expensive_function(old)
```

```
if (saving to disk):
```

```
    finish: isave_to_disk(old)
```

```
old = new
```

```
every 10 iterations:
```


```
    start: isave_to_disk(old)
```

```
end loop
```

- Two forms
- General non-blocking
 - `MPI_File_iread(fh, buf, count, datatype, request)`
 - finish by waiting on `request`
 - but no collective version
- Split collective
 - `MPI_File_write_all_begin(fh, buf, count, datatype)`
 - `MPI_File_write_all_end(fh, buf, status)`
 - only a single outstanding IO operation at any one time
 - allows for collective version


- How can I read MPI-IO files in a serial program?
- Using native format
 - data is raw bytes
 - use `fread` in C or direct access unformatted IO in Fortran
 - see `ioread.c` and `ioread.f90` for examples
 - Fortran approach is quite old-fashioned (direct access IO)
 - new `access="stream"` functionality makes this a bit simpler
- Other MPI-IO formats will require more work!
- Note that you can do single process IO in MPI-IO
 - pass `MPI_COMM_SELF` to `MPI_File_open`

- Recall schematic overview of parallel file system Lustre

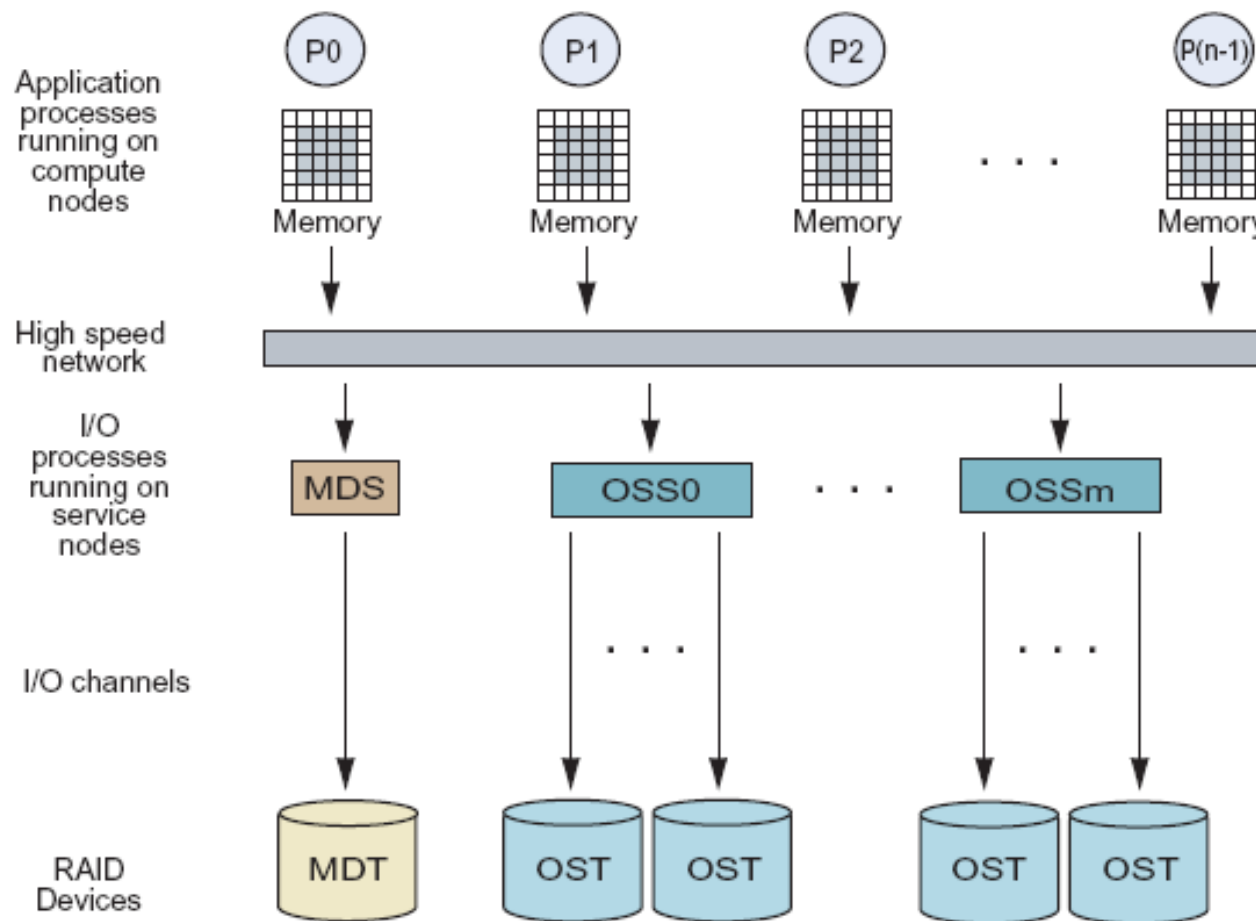


- Implementing MPI-IO has achieved
 - all data going to a single file
 - minimal stress on Meta Data Server (MDS) – a serial bottleneck
 - potential for many processes to write simultaneously
- But ...
 - performance requires multiple parallel writes to disk
 - in Lustre, requires multiple Object Storage Servers (OSS) writing to multiple Object Storage Targets (OST)
 - an OSS is like an IO server, an OST is like a physical disk
- User has control over assignment of files to OSTs
 - but default is only a few OSTs
 - MPI-IO performance not much better than naïve master IO

- Can split a file across multiple OSTs
 - each block is called a “stripe”
- **lfs setstripe -c 8 <filename>**
 - stripes across 8 OSTs
 - has substantial benefits for performance
- Test case
 - 2048 x 2048 x 2048 array across 4096 processors (16 x 16 x 16)
 - file size is 32 GB
 - identical IO approach as used exercise
 - generalised to 3D
 - local halos automatically stripped off with derived type in MPI-IO write call

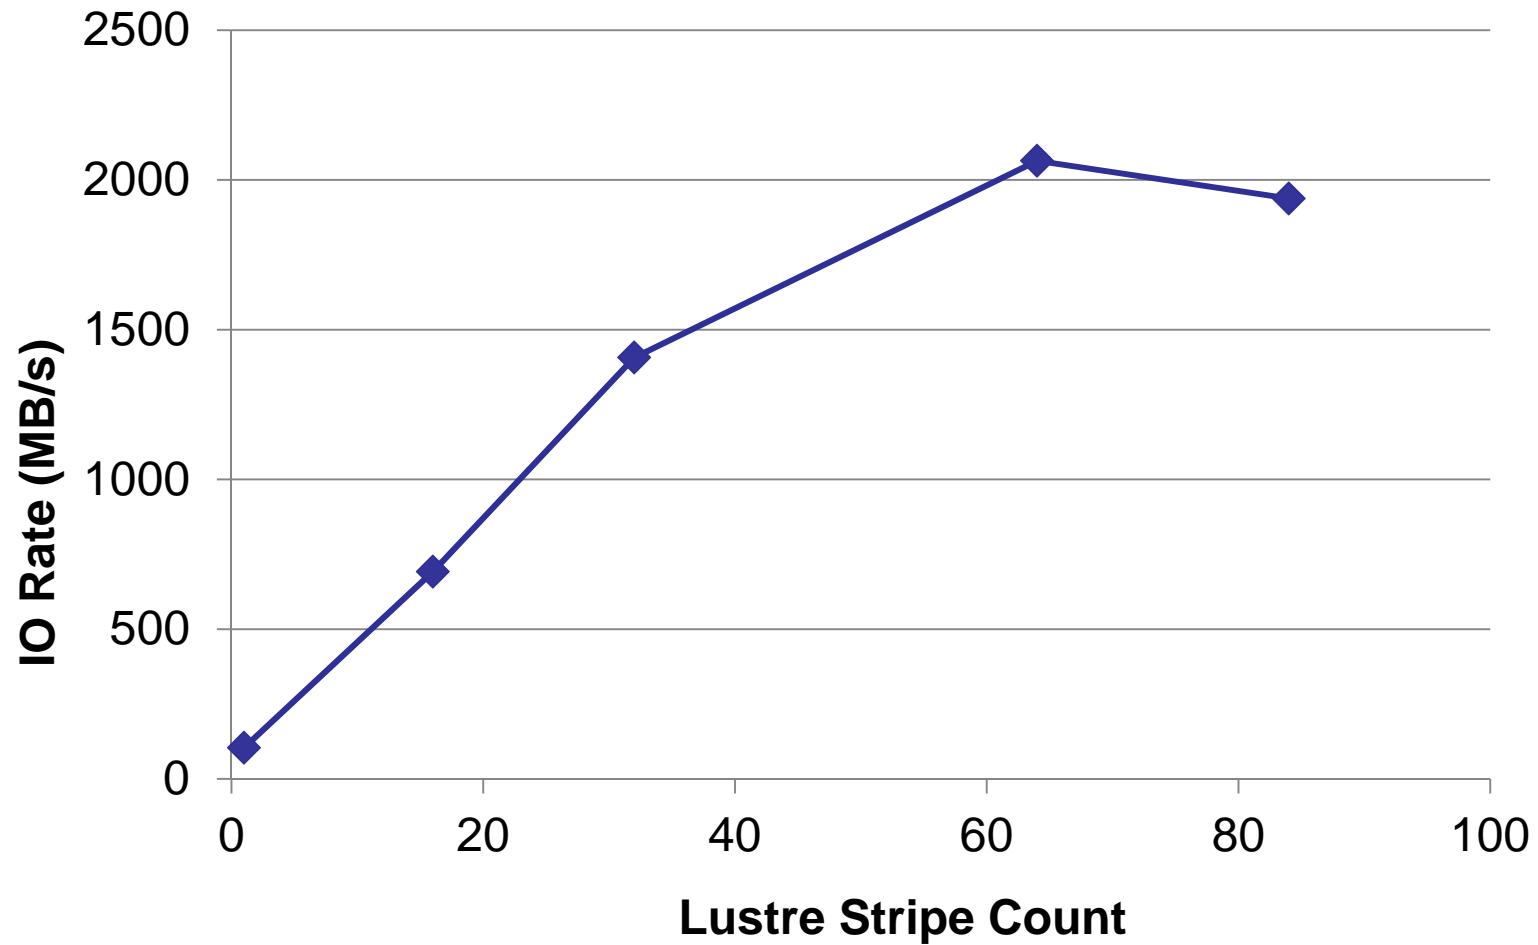

- MPI-2 web pages
- Another tutorial
 - `www.sdsc.edu/us/training/workshops/institute2005/docs/Thakur-MPI-IO.ppt`
- MPI-2 book
 - `http://www-unix.mcs.anl.gov/mpi/usingmpi2/`

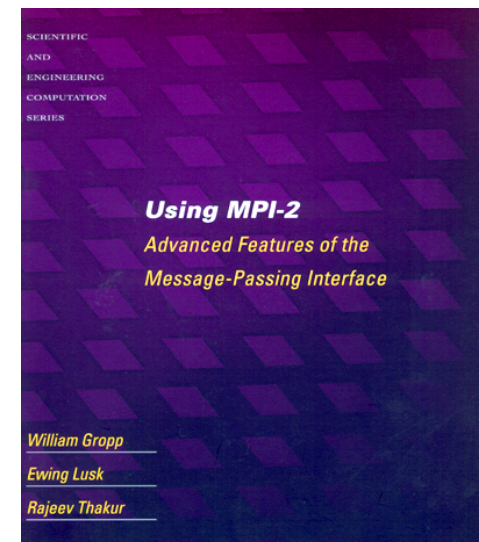

ARCHER training: <http://www.archer.ac.uk/training/>

Efficient Parallel I/O on ARCHER

- Oxford, 10-11 December 2015
- Registration is currently open

Finally:

Please fill in the feedback if you haven't already!

<http://www.archer.ac.uk/training/feedback/>